

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
21 July 2005 (21.07.2005)

PCT

(10) International Publication Number  
**WO 2005/067073 A1**

- (51) International Patent Classification<sup>7</sup>: H01L 41/113, B60C 23/04
- (21) International Application Number: PCT/IB2003/006218
- (22) International Filing Date: 29 December 2003 (29.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): PIRELLI PNEUMATICI S.p.A. [IT/IT]; Viale Sarca, 222, I-20126 Milan (IT).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): MANCOSU, Federico [IT/IT]; PIRELLI PNEUMATICI S.p.A., Viale Sarca, 222, I-20126 Milan (IT). RAMPANA, Barbara [IT/IT]; PIRELLI PNEUMATICI S.p.A., Viale Sarca, 222, I-20126 Milan (IT). MARIANI, Fabio [IT/IT]; PIRELLI PNEUMATICI S.p.A., Viale Sarca, 222, I-20126 Milan (IT). CALATRONI, Andrea [IT/IT]; PIRELLI PNEUMATICI S.p.A., Viale Sarca, 222, I-20126 Milan (IT).
- (74) Common Representative: PIRELLI PNEUMATICI S.p.A.; c/o POSTIGLIONE, Ferruccio, Jacobacci & Partners S.p.a., Via Senato, 8, I-20121 Milan (IT).
- (81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DE (utility model), DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND SYSTEM FOR GENERATING ELECTRICAL ENERGY WITHIN A VEHICLE TYRE

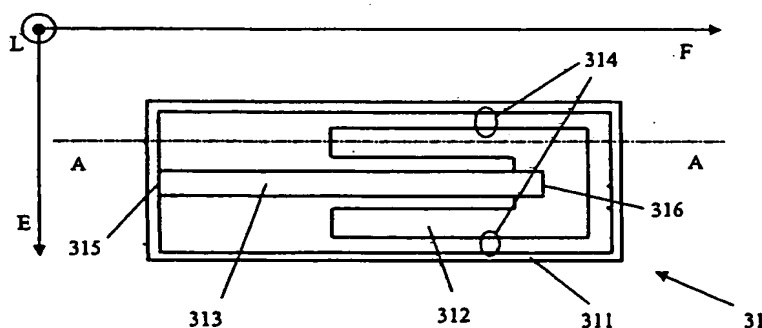

(57) Abstract: A tyre comprises a piezoelectric flexing element (313) associated to an energy storage device (e.g. a capacitor). The piezoelectric flexure element is mounted in cantilever fashion in a housing (311) so as to be positioned substantially along a plane orthogonal to a radial direction (E) of said tyre and, so that a first end (315) of the piezoelement is restrained to the housing. A loading mass (312) is coupled to the second end (316) of the piezoelectric flexure element. A small gap (314) is formed between the inner walls of the housing and the outer surface of the loading mass, in order to allow limited flexure of the piezo-electric element. The housing including the piezoelectric is mounted in a tyre portion in correspondence of a tread area of the tyre, preferably on the inner surface of the tyre. The piezoelectric element flexes under the action of the radial acceleration when the tyre rotates. The loading mass and the gap are chosen to obtain: a) small entity oscillations of the flexure element substantially during a complete revolution of the tyre, when the tyre rotates at low speed; b) large entity oscillations of the flexure element substantially only during the passage of the tyre portion including the piezoelectric element in the contact patch. Sufficient electrical power for powering an electronic device included within the tyre is obtained, together with a long durability of the piezoelectric element.



WO 2005/067073 A1